


SLIDING PATIO DOOR Blinds Between Glass (BBG)



**No Dusting
Non-Fading
Aluminum Slats**

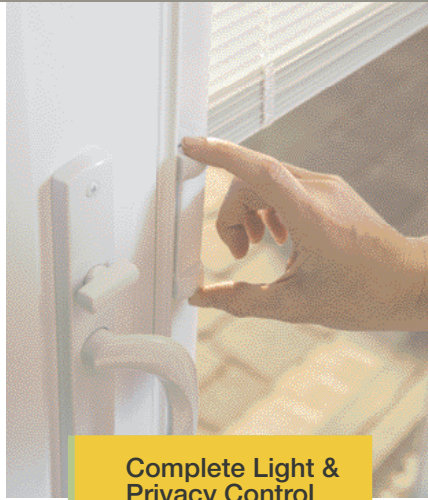

**Complete Light & Privacy Control
Energy Efficient
Dual Pane Glass**




**Child & Pet Safe
Tempered Glass
No Dangling Cords**

For instant control of light, privacy and heat transfer for sliding patio doors, choose from Western Reflection's insulated glass with built-in-blinds. Sealed inside tempered safety glass, the blinds are protected from dust and damage from everyday use. They're also safe for children and pets because they have no exposed cords.

Blinds Between Glass (BBG) offer industry-leading reduced travel operation for raise, lower and tilt functions; and full privacy and light control. The enclosed blinds are manufactured using Intercept®, a warm edge space technology, that provides best-in-class energy efficiency and performance.

Sliding patio door blinds between glass are supplied as insulated glass units. These units are available with clear/clear, clear/Low-E or Low-E/Low-E glass in sizes ranging from 38"-80" in height and 14" to 36" in width (1/16" increments). We also have programs that allow flexibility in ordering to accommodate manufacturers' volume requirements.

 Easy operation


EASY TO OPERATE

- Fingertip adjustment
- Slide controllers raise, lower, and tilt blinds
- No reaching or stooping to adjust blinds

 Safe for children and pets


PROMOTES SAFETY

- Tempered safety glass
- Concealed cords
- Safe for children and pets

 No Dusting

SIMPLIFIES MAINTENANCE

- No dusting; Easy to clean
- No tangled cords
- Decreases allergens

 Control of light and privacy

CONTROLS HOME IMPROVEMENT

- Provides multiple levels of privacy
- Regulates light and UV rays
- Sound transmission suppression

 Energy efficient insulated glass

IMPROVES ENERGY SAVINGS

- Reduces solar heat gain
- Dual pane insulation
- Low-E glass available
- ENERGY STAR® certifiable

 Durability

BUILT TO LAST

- No crimping or denting of blind slats
- Non-fading aluminum slats
- 10 Year Limited Warranty
- ASTM E2190 Certified

| SIZES | |
|--|---|
| IG thickness | 1" |
| Height range | 38" to 80" |
| Width range | 14" to 36" |
| Size increments | 1/16" (height & width) |
| MATERIALS | |
| Spacer | Intercept®, tin plated steel |
| Glass (std.) | 1/8" tempered safety glass |
| Glass (Low-E) | 1/8" tempered safety glass 2nd surface soft coat Low-E 4th surface hard coat Low-E (optional) |
| Blind slat | 12.5mm wide aluminum UV stabilized coating |
| Sealant | Dual seal equivalent |
| Desiccant | Desiccant matrix (moisture and chemical management) |
| Decorative cover caps | UV stabilized, heat tolerant, polymer |
| CODE COMPLIANCE | |
| IGCC (seal) | ASTM E2190 seal certification |
| ANSI (glass) | ANSI Z97.1 safety glazing |
| ASTM (glass) | ASTM C1036 & C1048 temper |
| ENERGY STAR® | Can use in doors to meet ENERGY STAR® criteria |
| NFRC | Reference Certified Product Directory for sliding door examples (CAD available for simulations) |
| OPERATION | |
| Dual operator | Raise/lower and tilt |
| Capillary tube | Do not block, crush or cut |
| COLORS | |
| Blind slat | White (Duracron UC76584) |
| Decorative cover caps | White (Duracron UC76584) |
| Sealant | Gray |
| Operator | White |
| Operator Track | White |
| MAINTENANCE | |
| Clean glass with quality window cleaner, as needed | |
| PROGRAMS | |
| Standard | 1,000+ units per year |
| FLEXBBG™ | Min/One: 1+ Units 10 day clear lead time 15 day Low-E lead time Tier 1: 10 - 40 units of ea. size 30 day lead time Tier 2: 40+ units of ea. size 30 day lead time Tier 3: 80/160+ units per quarter (min) 30 days first order 10 days on additional orders |
| WARRANTY | |
| 10 year limited warranty | |

